



RFR811

13.56MHz NFC Reader

CHAMPTEK[®]
We value your ID's

Introduction

Near Field Communication (NFC) is a popular technology in recent years, and is becoming a set of standards for smart phones and similar devices to establish radio with each other by touching them together or bringing them into close proximity, usually no more than a few centimeters.

The RFR811 is a host-linked contactless card reader developed based on 13.56 MHz Contactless Technology. Compliant with the ISO/IEC18092 standard for Near Field Communication (NFC), it supports MIFARE[®], ISO 14443 A and B, ISO15693, ISO 18092 Tag and FeliCa cards.

The RFR811 is ideal for both secure personal identity verification and online micro-payment transactions. Other applications include access control, e-payment, e-ticketing for events and mass transit, toll toad fare collection and network authentication.

The RFR811 comes with an optional holder with it could mount the reader either on desk or wall, so that users can tap contactless cards on NFC-enabled devices onto the RFR811 with ease.


Features

- Card Reader
 - Read/write speed up to 424 kbps
 - Built-in antenna for contactless tag access, with card reading distance of up to 50 mm (depending on tag type)
 - Supports Near Field Communication (NFC) ISO 18092 Tag
 - Completely integrated protocol handling for ISO 15693, ISO 14443A/B, MIFARE and FeliCa.
 - Built-in anti-collision feature (only 1 tag is accessed at any time)
 - Operation Voltage 5 Vdc
 - NFC Support:
 - Can read all card UID, MIFARE (APDU command) read/write or ISO15693 read/write (APDU Command) in different models
 - RS232 or USB Interface support
 - Peripherals
 - 2 color LED
 - buzzer
- An optional holder with it could mount the reader either on desk or wall

RFR 811

Applications

- Mobile Devices (Tablets, Handsets)
- Secure Pairing (Bluetooth, WiFi, Other Paired Wireless Networks)
- Public Transport or Event Ticketing
- Passport or Payment (POS) Reader Systems
- Product Identification or Authentication
- Medical Equipment or Consumables
- Access Control, Digital Door Locks
- Sharing of Electronic Business Cards

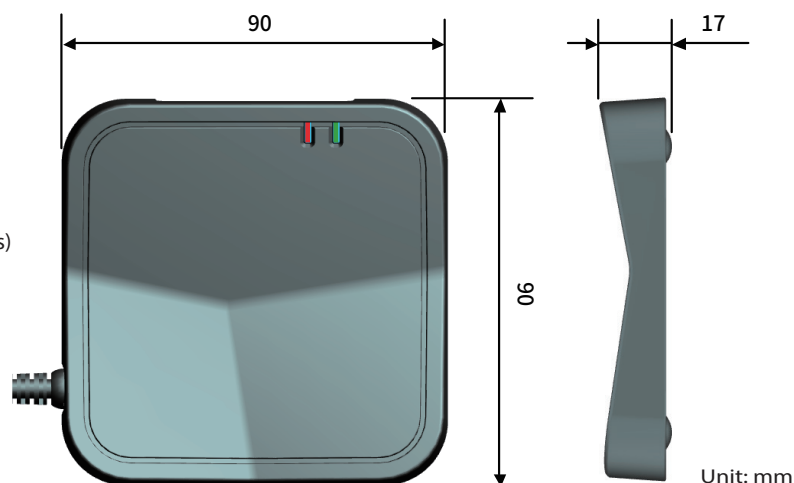

Physical Characteristics

Weight	
Body weight	Approx. 125g / 4.41 oz (w/o cable)
Material	
ABS and Rubber stop	
Cable Length	
5FT. (150cm)	
Interface cable	
USB or RS-232	
Dimension	
90 mm W x 90 mm H x 17 mm L	
Color available	
Black	

Electrical Characteristics

Interface	RS232	USB
Supply Voltage		
DC +5V $\pm$ 5%		
Output Voltage (Typ.)		
$\pm$ 9V +5V		
Power On (Max.)		
120mA 120mA		
Stand by (Max.)		
110mA 110mA		
Operation (Max.)		
210mA 210mA		

Performance

Operating Frequency	13.56 MHz
Compliance	ISO14443 Type A & B
	ISO 15693 ISO 18092 Tag
	MIFARE
	FeliCa
Operating Distance	Up to 50 mm (depends on the tag type)


Model

Model	Function	13.56 MHz
RFR811	Read Card UID only	ISO14443 Type A & B / ISO15693/ISO 18092 Tag/FeliCa
RFR811M	MIFARE read/write (APDU)	MIFARE
RFR811 i	ISO 15693 read/write (APDU)	ISO15693

Environmental

Operating Temperature	0°C to 50°C (32°F to 122°F)
Storage Temperature	-20°C to 70°C (-4°F to 158°F)
Relative Humidity	20% to 95% (Non-condensing)
Drop Resistance	59.05 inches(150cm)

Optional mounting brackets

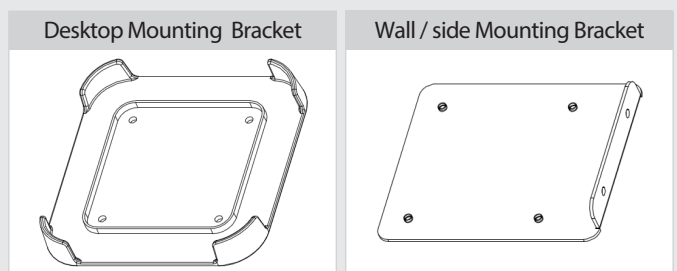

Regulatory

CE, FCC and LVD

Due to Champtek's continuing product improvement programs, specifications and features are subjected to change without prior notices.